




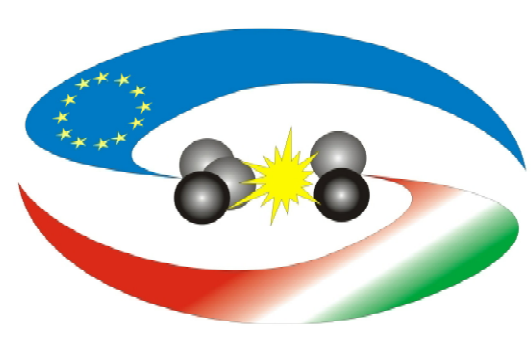

Association EURATOM/HAS

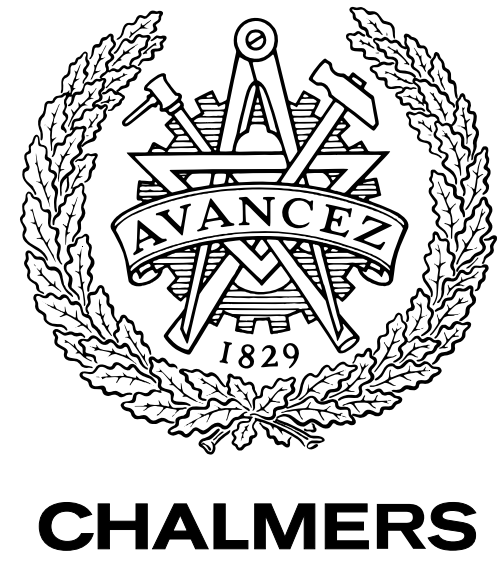

Overview of the RENATE beam emission spectroscopy simulation package

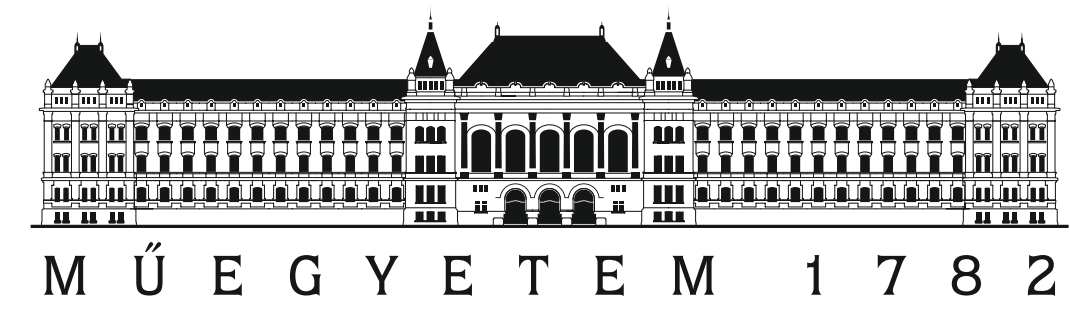

D. Guszejnov¹, G. I. Pokol¹, I. Pusztai², D. Réfy³, S. Zoletnik³, Y. U. Nam⁴

- 1) Department of Nuclear Techniques, Budapest University of Technology and Economics, Association EURATOM, Budapest, Hungary
- 2) Nuclear Engineering, Applied Physics, Chalmers University of Technology, EURATOM-VR Association, Göteborg, Sweden
- 3) Institute for Particle and Nuclear Physics, Wigner Research Center for Physics, Association EURATOM, H-1525, Budapest, Hungary
- 4) National Fusion Research Institute, Gwahangno 113, Daejeon 305-333, Republic of Korea

E-mail contact of project leader: pokol@reak.bme.hu

Introduction, motivation

Beam Emission Spectroscopy (BES) is a diagnostic method used for density and density fluctuation measurements in fusion plasmas [1].

Association EURATOM-HAS has been building a large number of BES measurements around Europe.

The desire for an accurate and comprehensive simulation of the BES diagnostic, which could be used in the evaluation of BES measurement results [2] and the development of new BES systems [3], led to the development of RENATE (Rate Equation for Neutral Alkali-beam Technique).


RENATE features

RENATE incorporates different levels of simulation of the BES diagnostic system: from the calculation of rate coefficients of atomic processes to the calculation of the photon current reaching the detector surface.


RENATE takes all the relevant atomic processes into account:

- collisional excitation/deexcitation
- collisional ionization
- charge-exchange reactions
- spontaneous deexcitement


Supported beam types

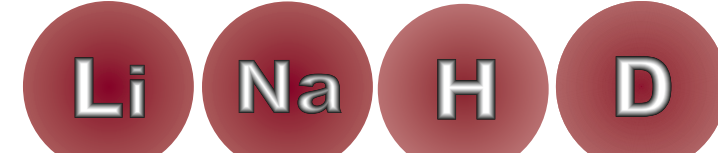


Calculates photon current detected by the observation system

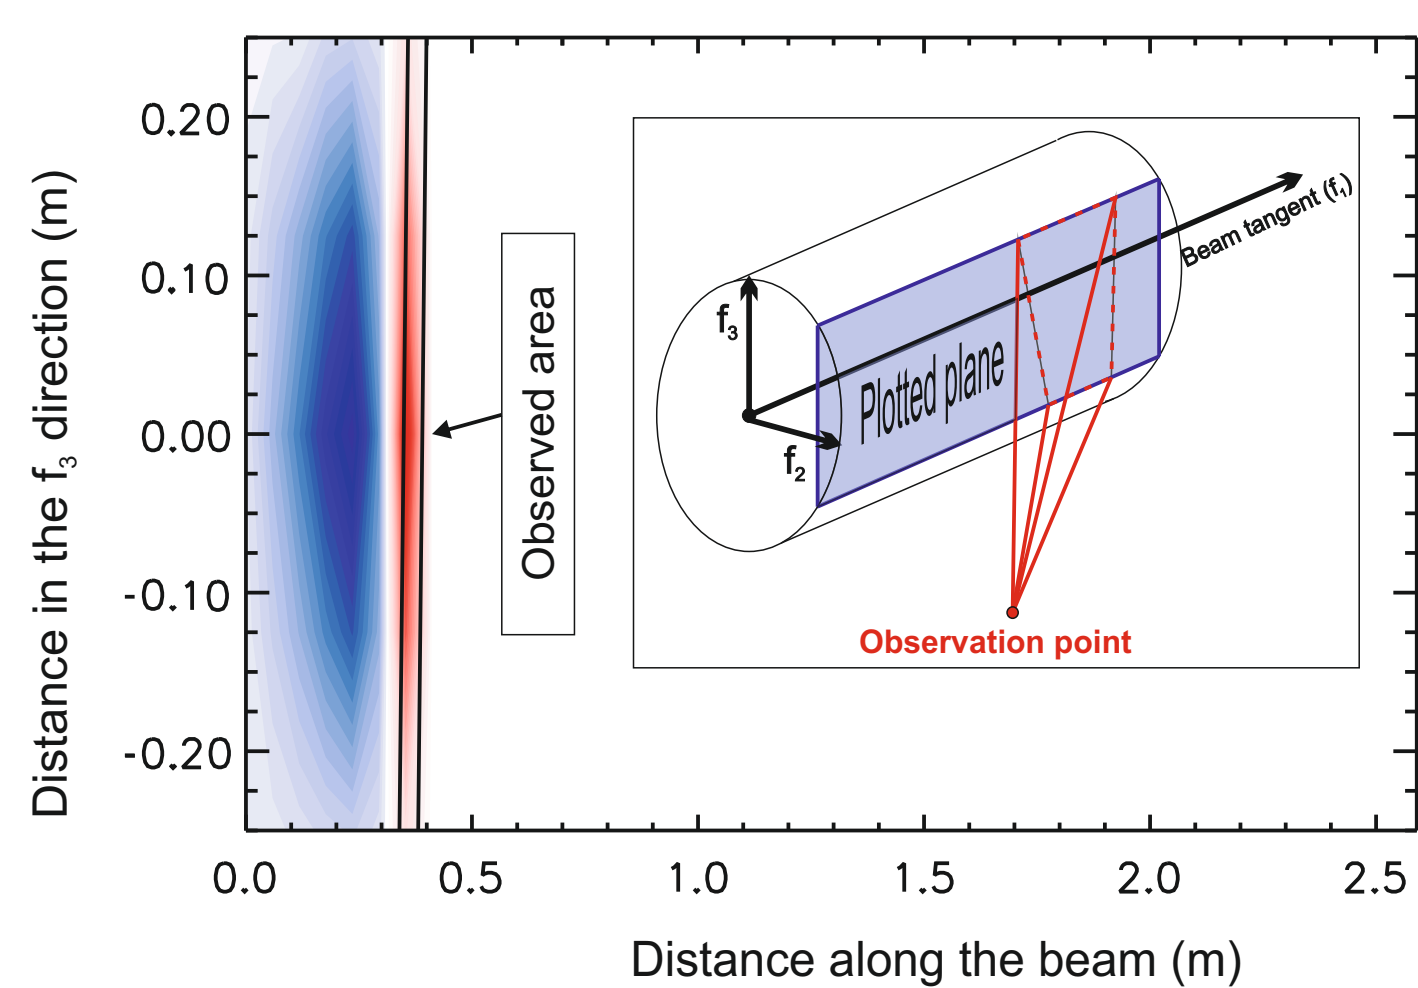

Able to use simple, but flexible pinhole or a more sophisticated ray-tracing optical modelling.

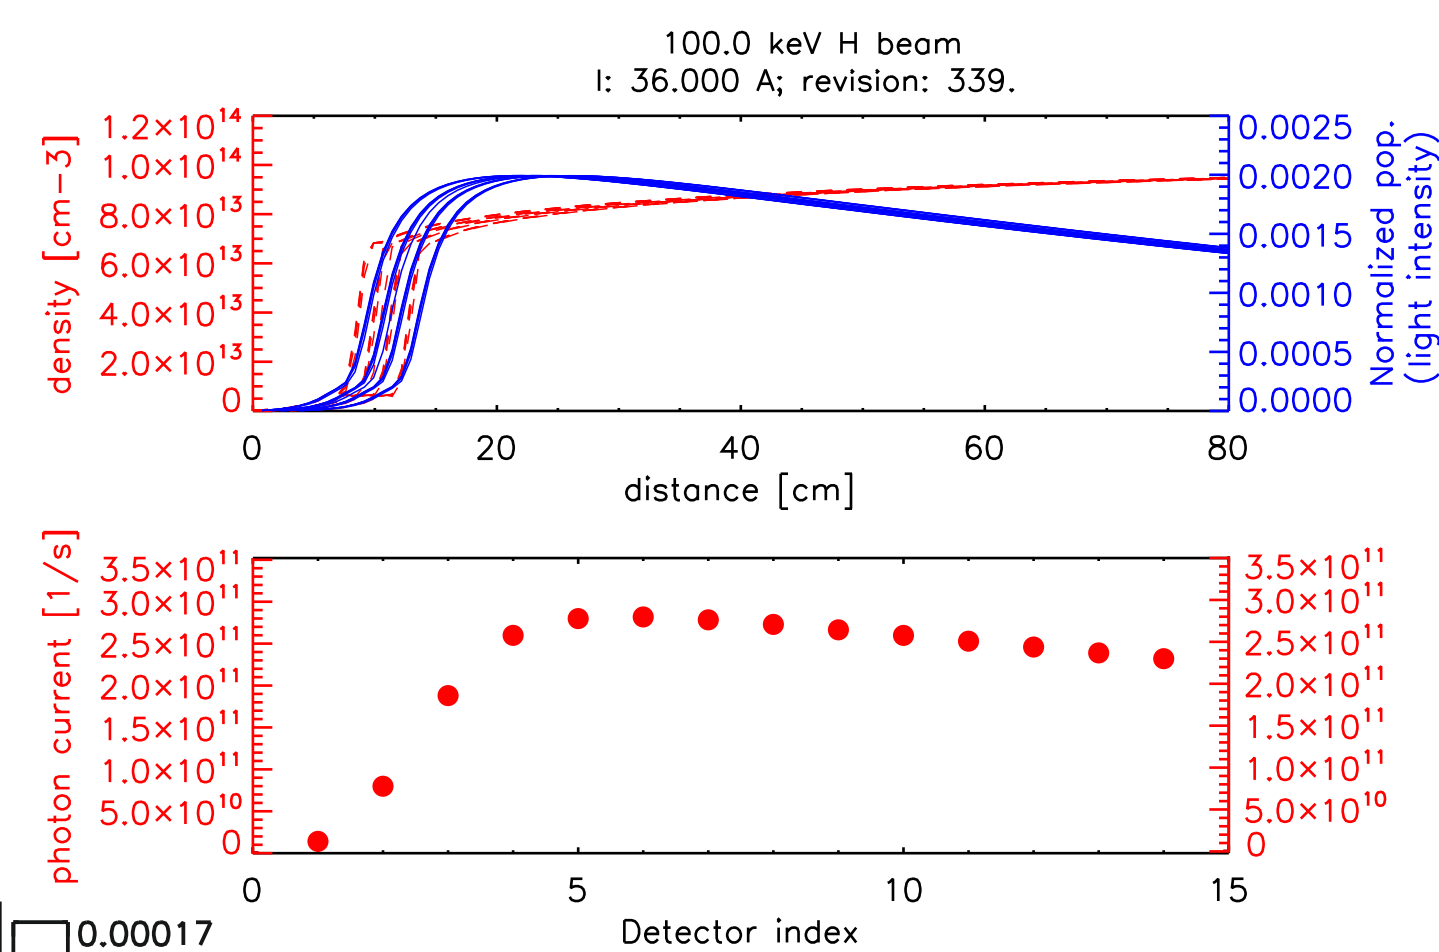


Calculates the 3D density fluctuation response matrix

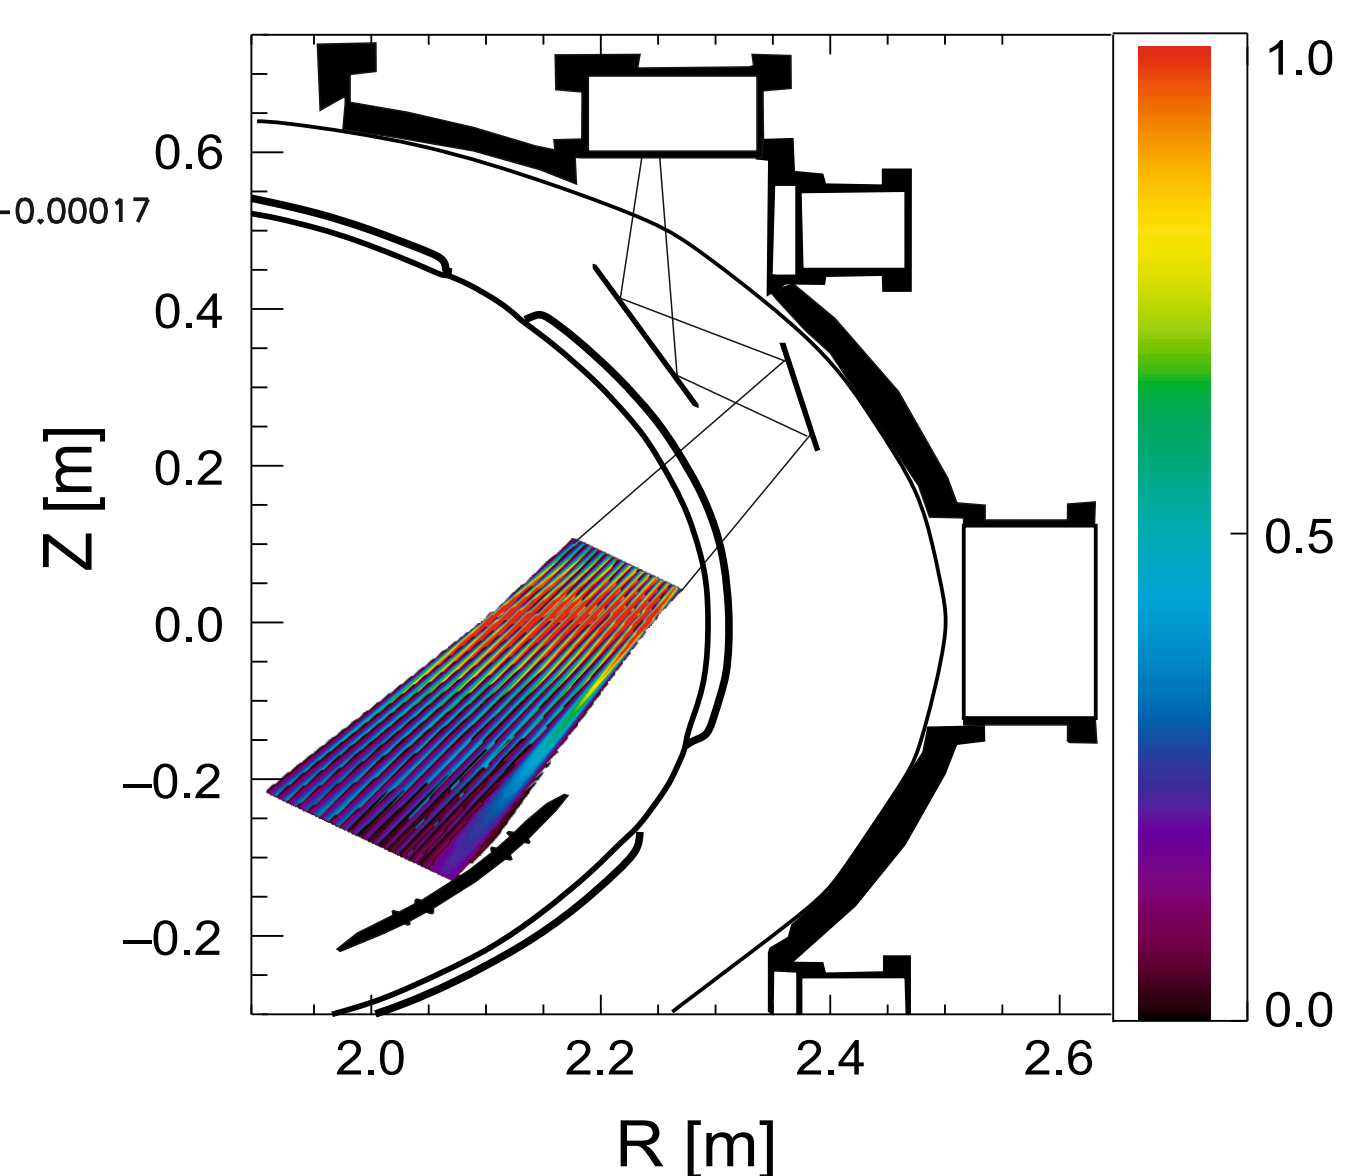

Benchmarking


The rate equation solver module of RENATE has been benchmarked against the CRM code developed by O. Marchuk [4] for hydrogenic beams, and against the SIMULA code [5] for lithium beams.

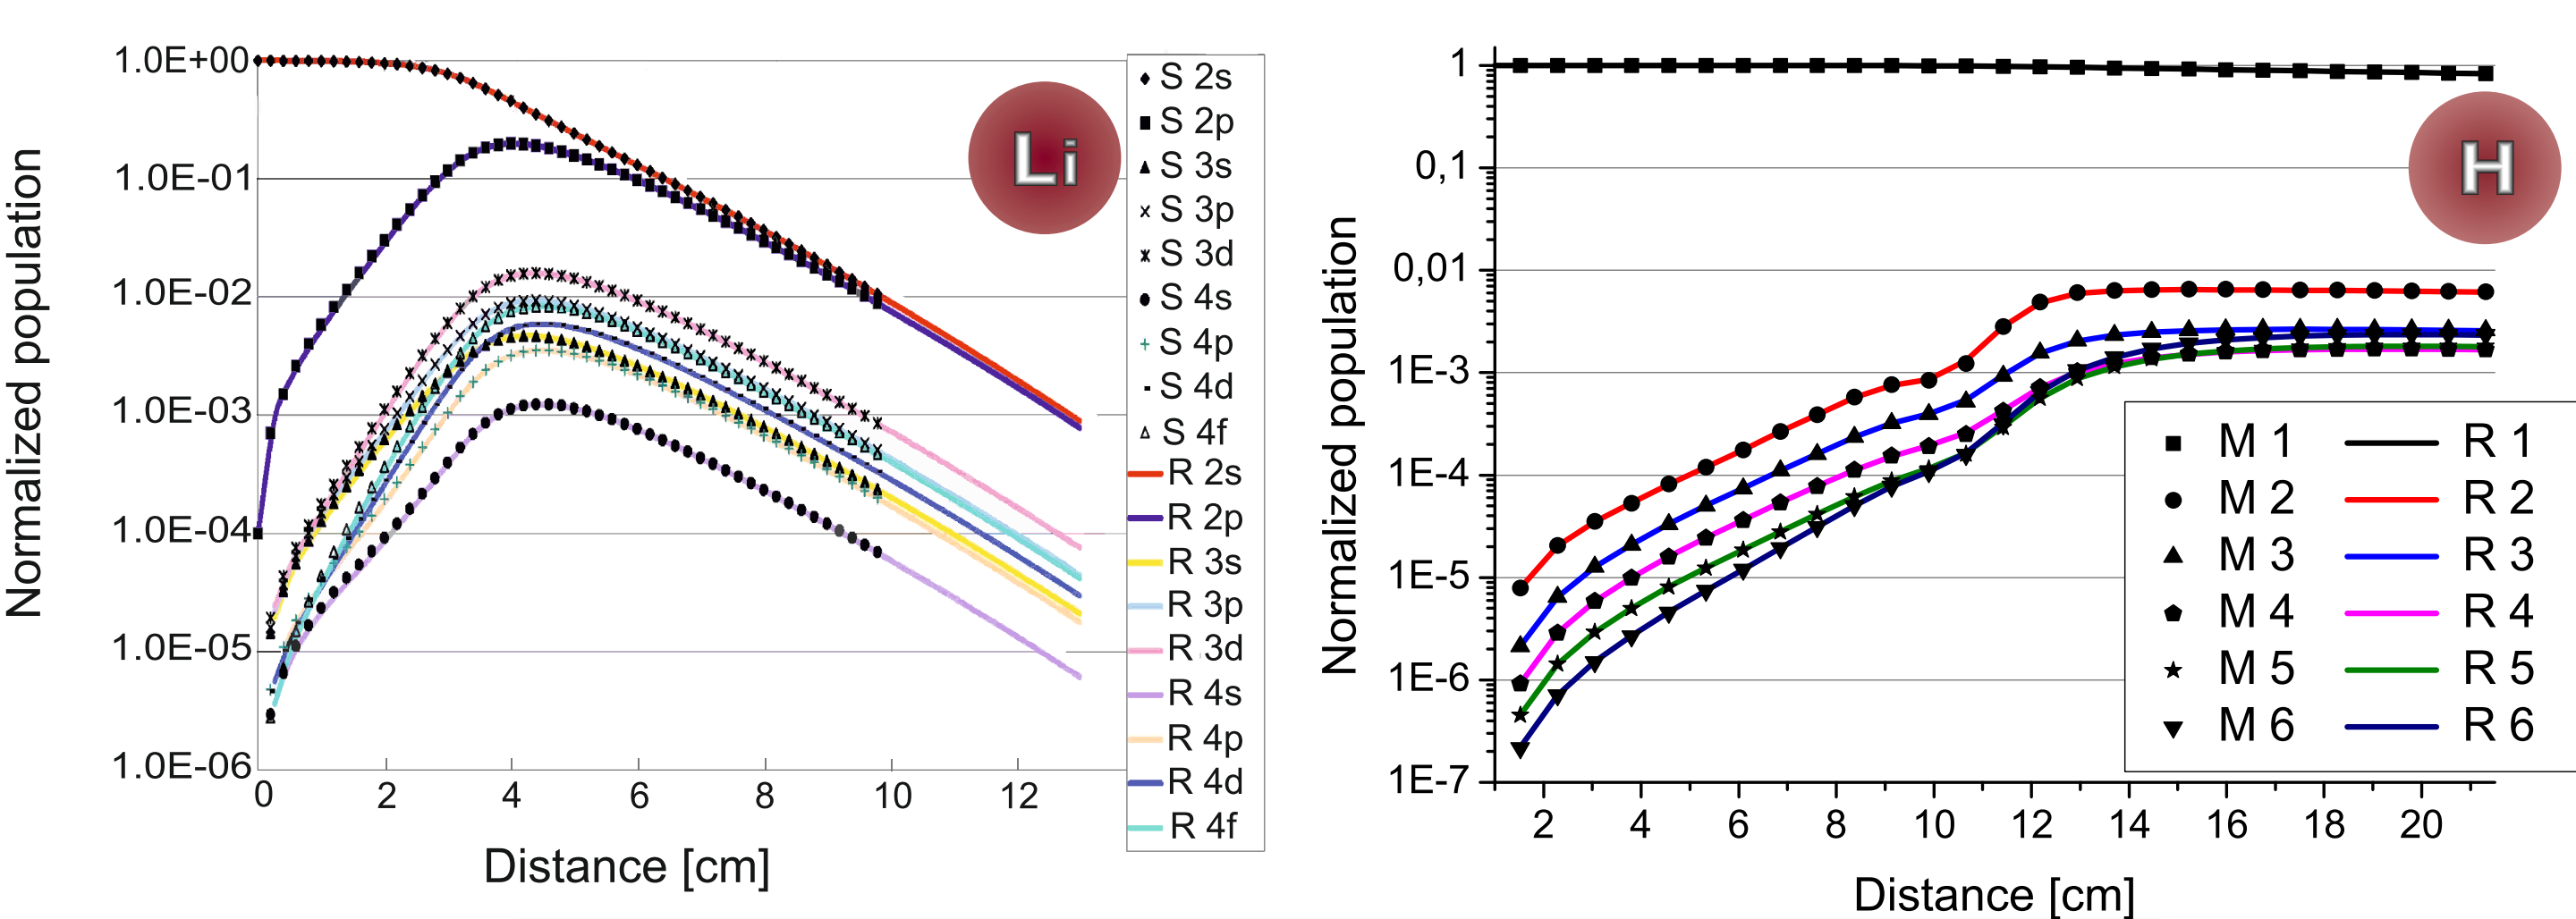

Evolution of the population of atomic levels along the beam normalized to the initial particle number, calculated by RENATE (R), CRM code by O.~Marchuk (M) and Simula (S).


Comparison with experiment

The results of RENATE have been compared against experimental results using data from the KSTAR BES trial measurement [6]. Since only line integrated density was measured an arbitrary density profile was used.

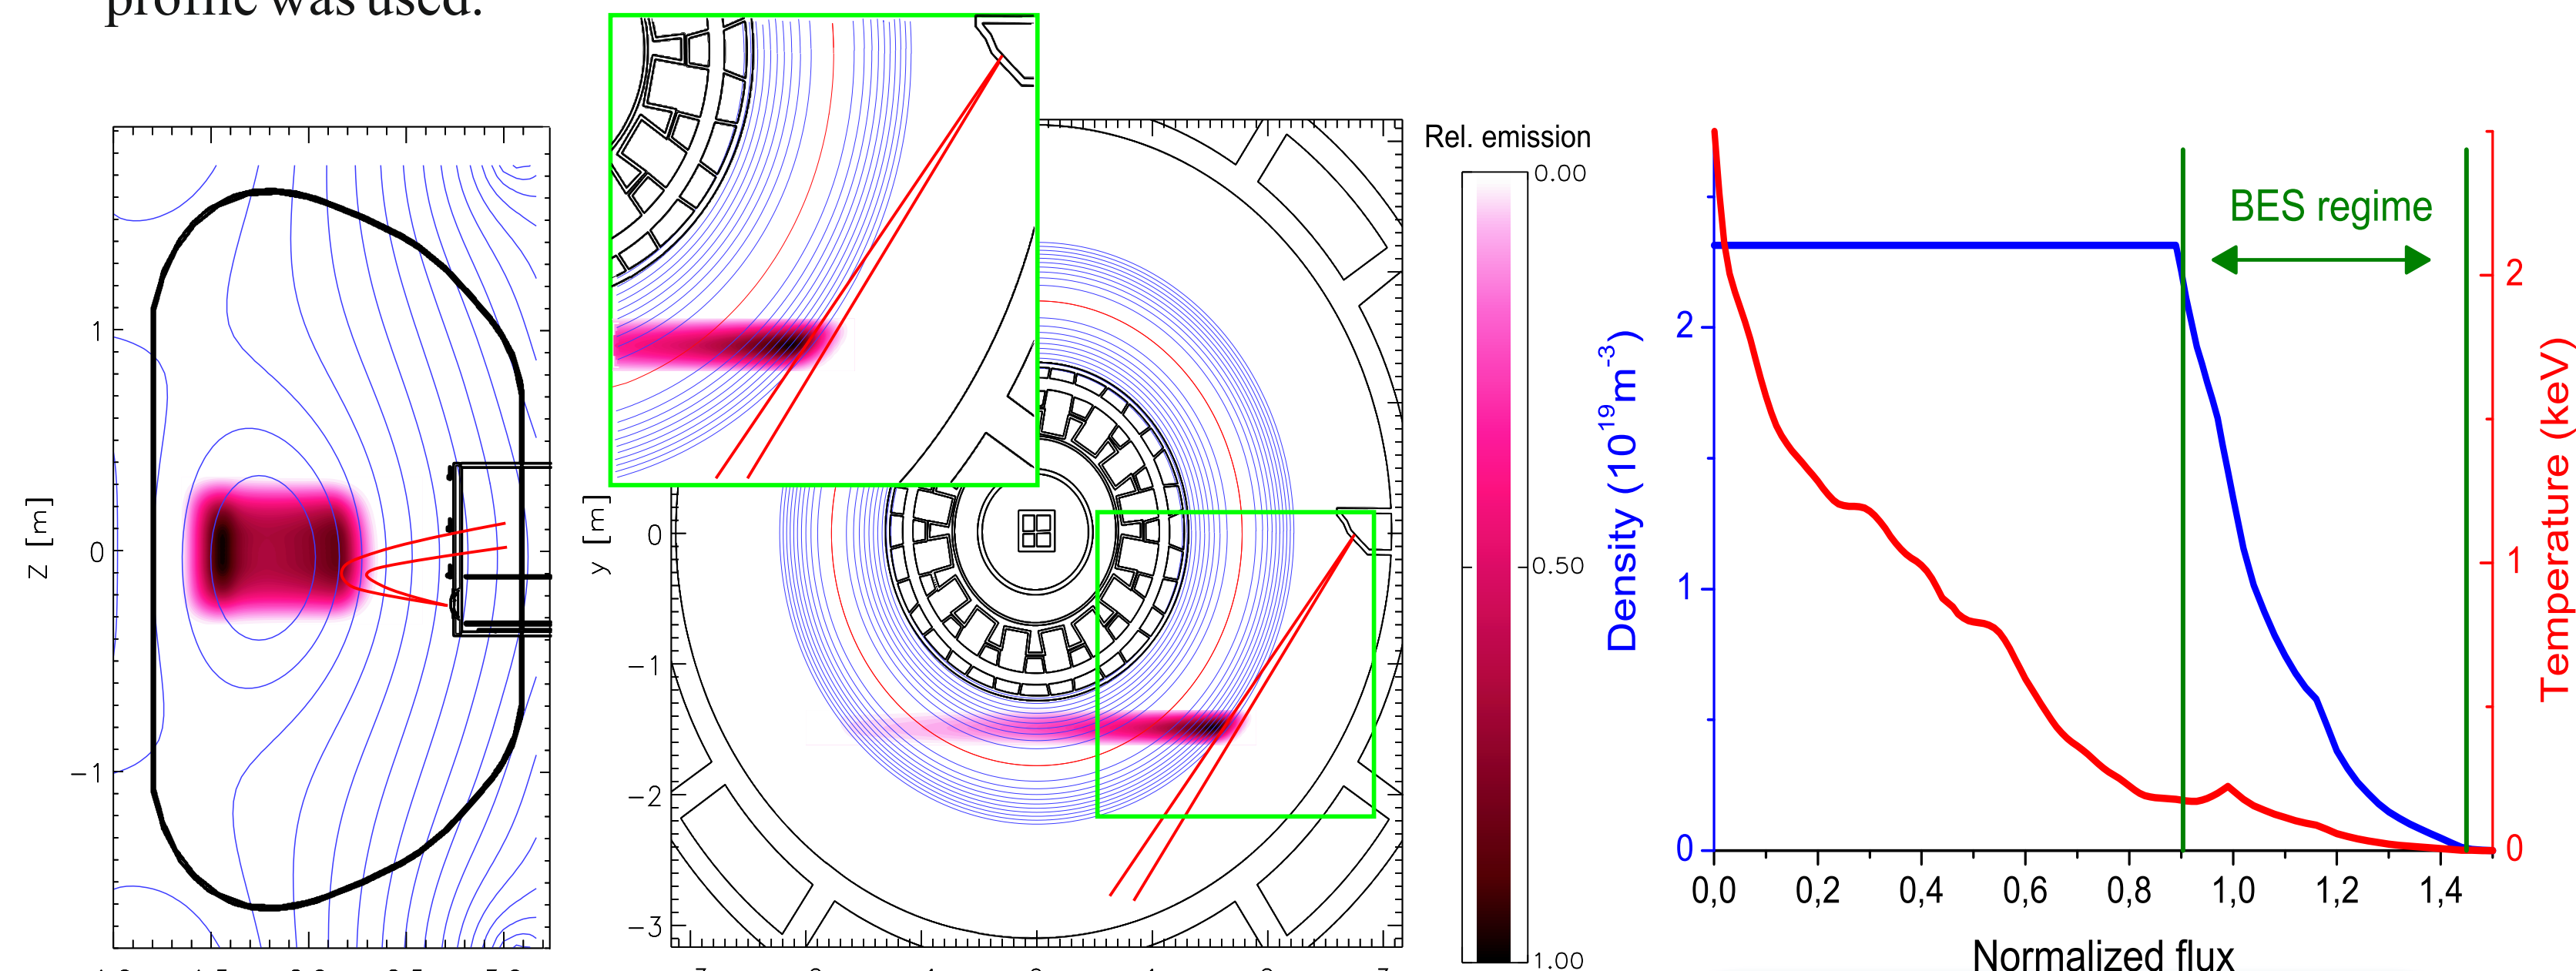

Density and temperature profiles used in simulation

Poloidal and toroidal projections of the simulated configuration, showing the emission distribution.

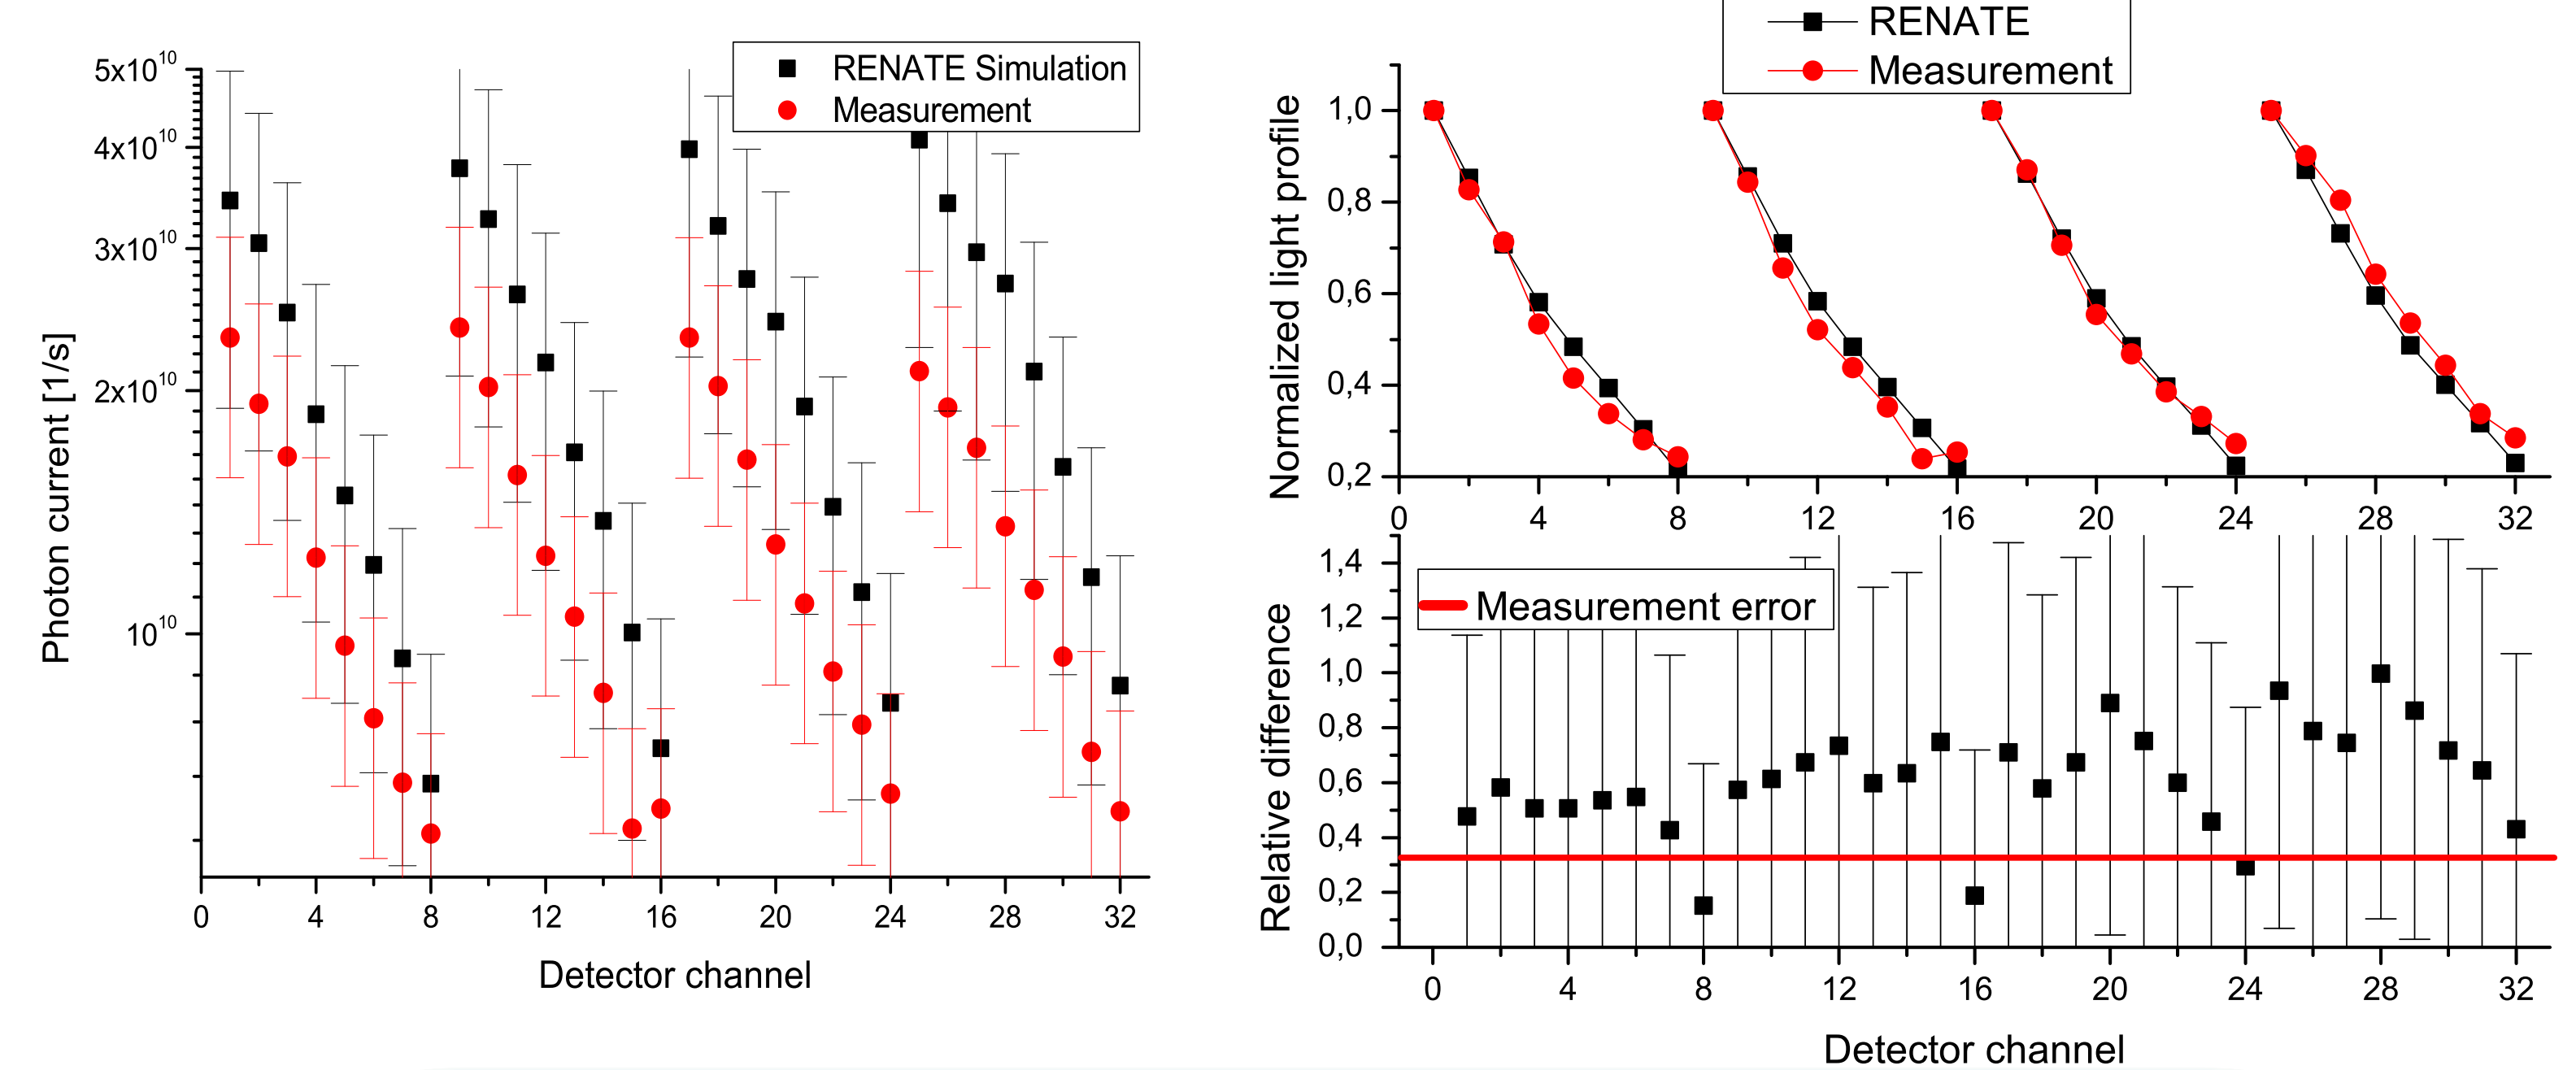

Measured and simulated photon currents for individual detector channels for KSTAR #6123 at 1744 ms. The detectors are sorted into a 4 x 8 matrix, indexing start from the detector of the first row observing the innermost part of the plasma.

Conclusions

The RENATE is a simulation tool that is capable of simulating most key processes of the beam emission spectroscopy. Its rate equation solver core has been benchmarked against other known CRM codes. Its results have also been compared against KSTAR data.

Future development

In the future RENATE is to be compared against other experimental results. It is also going to be upgraded to be able to take more wavelength shifting effects (e.g. motional Stark-effect) into account.

References

- [1] D. M. Thomas, et al.; *FST* **53** 488 (2008)
- [2] I. Pusztai, et al.; *RSI* **80**, 083502 (2009)
- [3] D. Guszejnov, et al.; *RSI* **submitted** (2012)
- [4] O. Marchuk, et al.; *RSI* **79** 10F532 (2008)
- [5] J. Schweinzer, MPI für Plasmaphysik, Garching, 2005.
- [6] Y. U. Nam, et al.; *RSI* **83**, 10D531 (2012)

Acknowledgement

This work was partly funded by the European Communities under Association Contract between EURATOM and HAS. The views and opinions expressed herein do not necessarily reflect those of the European Commission. Authors of this paper also acknowledge the support of the Hungarian National Development Agency under Contract No. NAP-1-2005-0013. One of the authors acknowledges the financial support of the grant TÁMOP-4.2.2/B-10/1-2010-0009. We are grateful for the support of E. Delabie, O. Marchuk and J. Schweinzer.